

4

3


2

1

SHOWN IN EXTENDED SHAFT POSITION

REVISIONS


ZONE	LETTER	DESCRIPTION	DATE	CHECKED	APPROVED

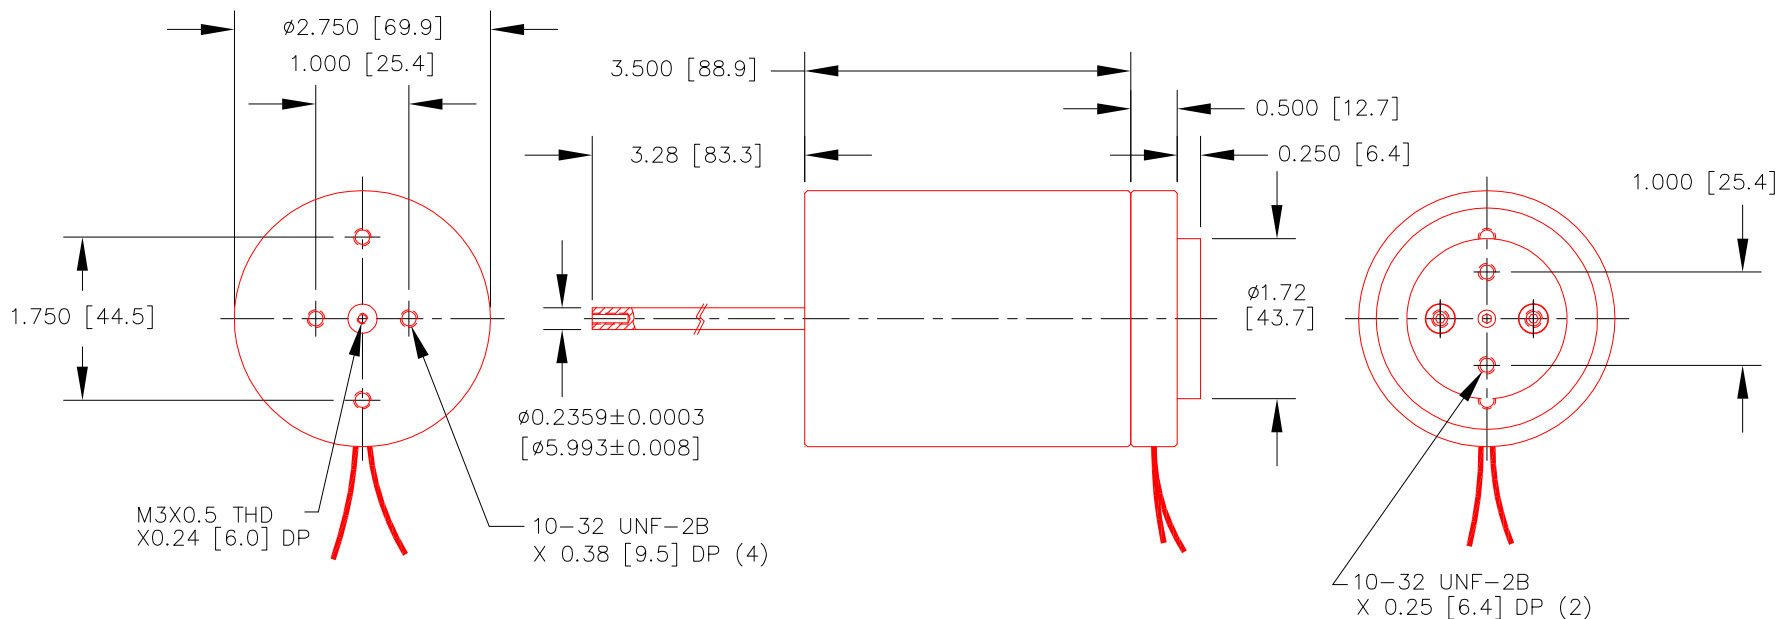

INTERMITTENT FORCE @10% DUTY CYCLE	198.3 N	44.6 LB
CONTINUOUS FORCE	62.8 N	14.1 LB
FORCE CONSTANT	11.5 N/A	2.6 LB/A
BACK EMF CONSTANT	11.5 V/M/S	0.29 V/IN/S
STROKE	63.5 mm	2.50 IN
COIL CLEARANCE PER SIDE	0.64 mm	0.025 IN
COIL ASSY MASS	488 GR	1.08 LB
BODY MASS	2.1 KG	4.6 LB
COIL RESISTANCE	2.0 Ohms	
COIL INDUCTANCE @ 1000 Hz	1.4 mH	
MAX CONTINUOUS POWER	60 W	
MAX TOTAL SHAFT SIDE LOAD	13.5 N	3 LB
LINEAR BEARING TYPE	PLAIN BUSHING	

ALL VALUES AT 25°C

NOTES:
UNLESS OTHERWISE SPECIFIED

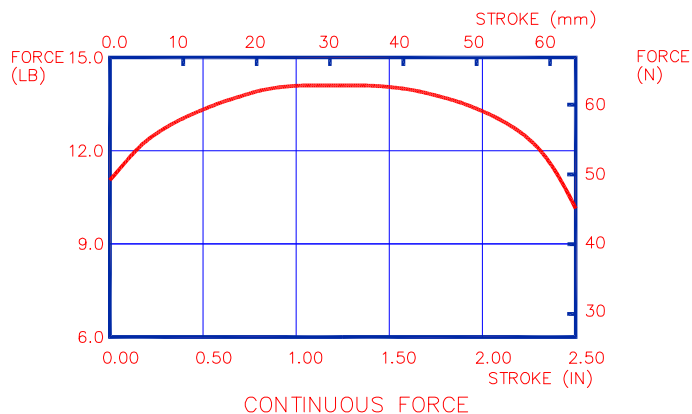

THIS DOCUMENT, WHETHER OR NOT MARKED AS PROPRIETARY, IS CONSIDERED CONFIDENTIAL AND SHALL REMAIN THE PROPERTY OF MOTICONT AND SHALL BE RETURNED TO MOTICONT UPON REQUEST WITH ALL COPIES MADE THEREOF. THIS DOCUMENT CANNOT BE UTILIZED IN THE MANUFACTURE OF ARTICLES SOLD OR OFFERED OR DISCLOSED TO ANYONE AND NO USE OF IT CAN BE MADE UNLESS EXPRESSLY AUTHORIZED BY AND UNDER THE DIRECTION OF MOTICONT. POSSESSION OF THIS DOCUMENT IS ACCEPTED SUBJECT TO THE FOREGOING.

DIMENSIONS ARE IN INCHES [mm] TOLERANCES ON: DECIMALS FRACTIONS ANGLES .XXX .XX ± 1/125 ± 1/2' ± .005 ± .01 UNLESS OTHERWISE SPECIFIED		MATERIAL	CONTRACT		motiCont LINEAR VOICE COIL MOTOR		
USED ON		FINISH	DRN				
NEXT ASSY			CHKD		DWG. NO.		REV.
APPLICATION			APPVD		GVCM-070-089-01S06		2
			APPVD		SCALE: 1 / 2		SHEET 1 OF 1

4

3

2

1