

4

3



2

1

REVISIONS

ZONE	LETTER	DESCRIPTION	DATE	CHECKED	APPROVED


SHOWN AT MID-STROKE

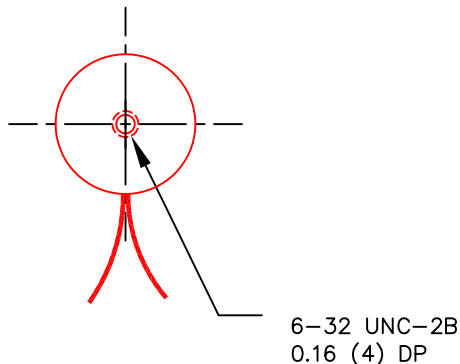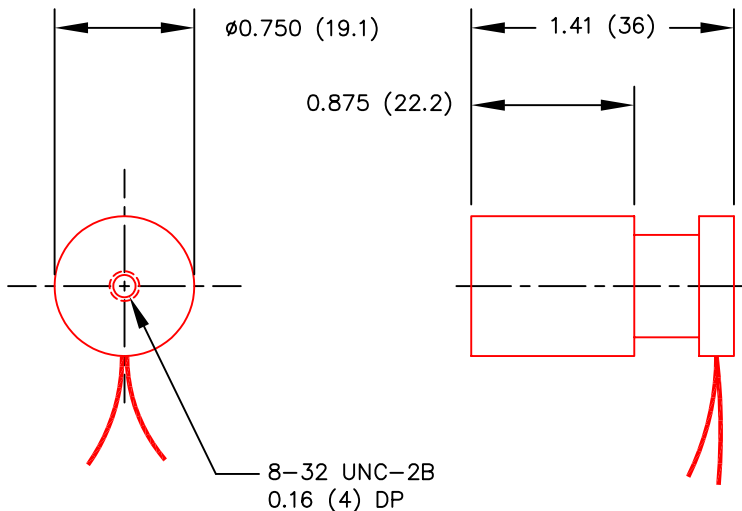

PEAK FORCE	7.4 N	26.6 OZ
CONTINUOUS FORCE	2.3 N	8.4 OZ
FORCE CONSTANT	1.6 N/A	5.8 OZ/A
BACK EMF CONSTANT	1.6 v/M/S	0.04 v/IN/S
STROKE	12.7 mm	0.50 IN
COIL CLEARANCE PER SIDE	0.33 mm	0.013 IN
COIL ASSY MASS	13 GR	0.46 OZ
BODY MASS	36 GR	1.27 OZ
COIL RESISTANCE @ 25°C	2.2 Ohms	
COIL INDUCTANCE @ 120Hz	610 uH	
MAX CONTINUOUS POWER	4.7 W	

ALL VALUES AT 25°C

NOTES :
UNLESS OTHERWISE SPECIFIED

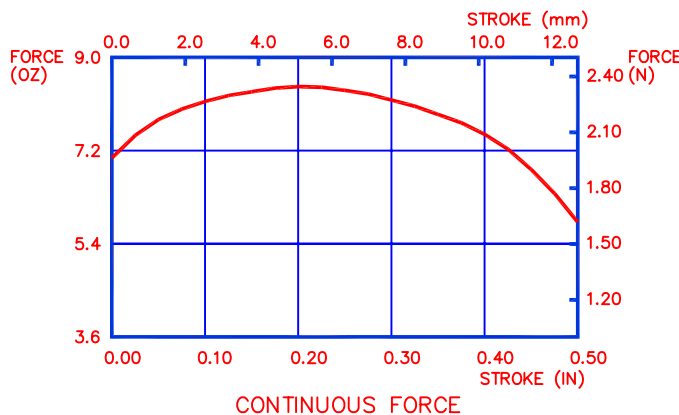

THIS DOCUMENT, WHETHER OR NOT MARKED AS PROPRIETARY, IS CONSIDERED CONFIDENTIAL AND SHALL REMAIN THE PROPERTY OF MOTICONT AND SHALL BE RETURNED TO MOTICONT UPON REQUEST WITH ALL COPIES MADE THEREOF. THIS DOCUMENT CANNOT BE UTILIZED IN THE MANUFACTURE OF ARTICLES SOLD OR OFFERED OR DISCLOSED TO ANYONE AND NO USE OF IT CAN BE MADE UNLESS EXPRESSLY AUTHORIZED BY AND UNDER THE DIRECTION OF MOTICONT. POSSESSION OF THIS DOCUMENT IS ACCEPTED SUBJECT TO THE FOREGOING.

DIMENSIONS ARE IN INCHES (mm) TOLERANCES ON: DECIMALS FRACTIONS ANGLES .XXX .XX ± 1/125 ± 1/2" ± .005 ± .01 UNLESS OTHERWISE SPECIFIED		MATERIAL	CONTRACT		motiCont LINEAR VOICE COIL MOTOR			
USED ON		FINISH	DRN					
NEXT ASSY			CHKD		A		LVCM-019-022-01	2
APPLICATION			APPVD		SCALE: 1 / 1		SHEET 1 OF 1	

4

3

2

1